


Installation Instructions

Juki TL98Q

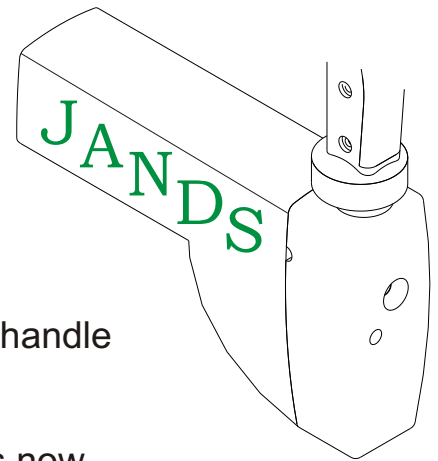

1. Using the 2 supplied tapping screws, attach the JANDS handle bracket as shown in Fig. 1.
2. Plug the control wire into the foot pedal jack. Machine is now ready for quilting. The knob on the grip will set the speed, and the trigger will start and stop the machine.
3. The two holes that the JANDS handle bracket mounts onto are oil access holes for the sewing machine. The JANDS handle must be periodically removed and the sewing machine oiled according to the owner's manual.
4. If you have to transport your machine, please remove the **JANDS** handle attachment.

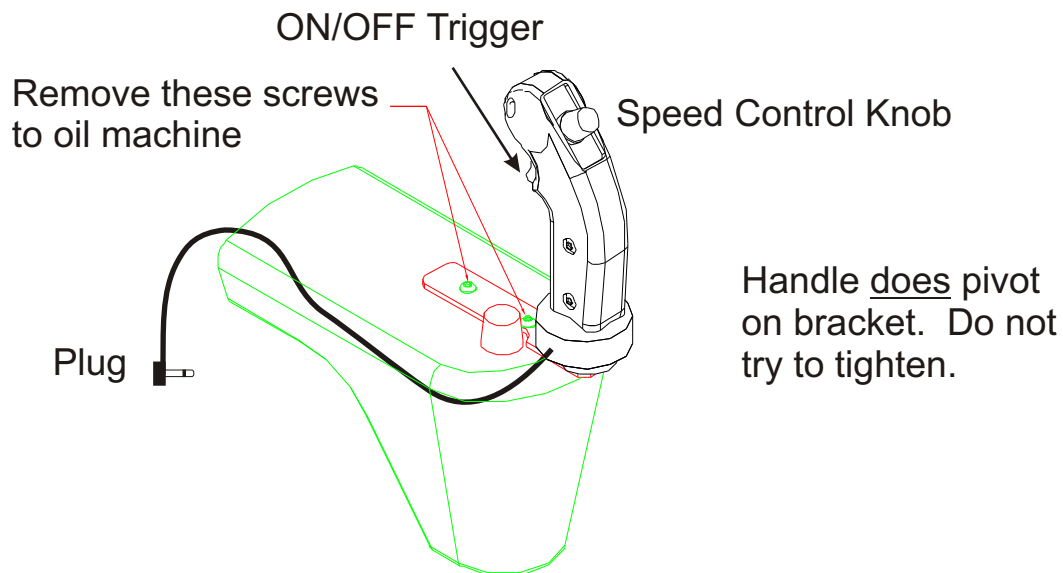


Fig. 1 Installed **JANDS** Assy.

TROUBLESHOOTING: If pressing the trigger does not run the machine, please ensure that the plug is connected properly and the knob is NOT tuned fully to one end or the other.

Thank you for purchasing this quality Canadian made product. The **JANDS** handle comes with a limited 1 year warranty from date of purchase.